


Installation Instructions

1" Aluminum Blinds

1" Aluminum Blinds: Your blind package contains brackets and screws for mounting the blind in any position on the window. The package should display a label that specifies the corresponding room name, window opening number as well as the mount option (inside or outside).

Tools needed: Cordless drill with #8 Robertson drive attachments, standard flat head screwdriver, tape measure & pencil.

Parts included: Installation brackets, centre support brackets (if needed), installation screws (2 per bracket), spacer blocks (if requested) & hold downs (if requested).

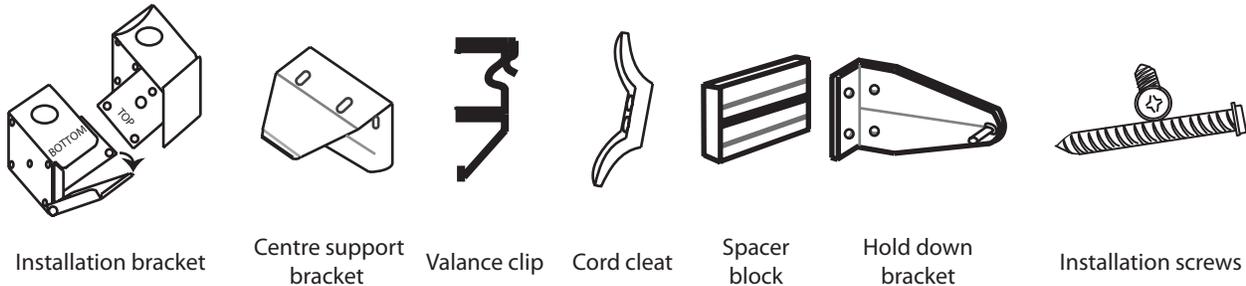


1. Mount the brackets: Attach the brackets to the window frame moulding, wall or ceiling. Brackets are universal and can be installed in both positions as shown in the illustration below.


If the blind was ordered as an "Outside Mount" blind, the factory has made the item exactly to the ordered size. Observe the width of the blind as displayed on the label and set your brackets apart accordingly. Use a tape measure and a pencil to softly mark the limits since the brackets haven't been screwed in yet. Use a minimum of two screws per bracket.

If the blind is over 60" wide, centre supports are included with parts and need to be installed. Centre supports are to be separated evenly. Install centre supports so that they do not interfere with any lift cords or slat ladders.


Optional spacer blocks: If the blind must be extended from the wall, due to window cranks or other objects of this nature, space blocks are provided (if requested) for the installation as well as centre support brackets.



1.1 Bracket installation for inside mount




1.2 Bracket installation for outside mount



1.3 Centre support bracket installation

2. Attaching the valance clips: For inside mount blinds, attach valance clips to the headrail before you hang the blind. For outside mount blinds, valance clips can be attached before or after hanging the blind. Position valance clips above each slat ladder.

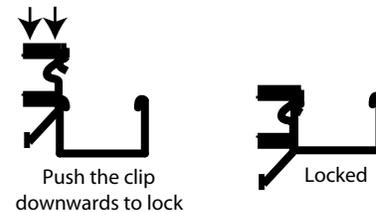


2.1 Attaching the valance clips


3. Hanging the blind: Install the blind by slipping the headrail into the installation brackets (doors being in the up position). Make sure the bracket doors are securely locked when snapped shut.

Installation Instructions



4. **Attaching the valance:** Clip the plastic insert into the plastic clips that are now attached to the headrail.
5. **Hold down brackets (optional):** Hold down brackets are available upon request. These brackets are used to hold the bottom rail of the blind securely in place. Hold down brackets are commonly used on french doors and like conditions.
6. **Installation of cord cleats:** Attach the cord cleat at least 64" from the floor. Once the cleat is mounted, simply wrap the excess cord around it after each use of the blind.



6.1 Installation of cord cleat

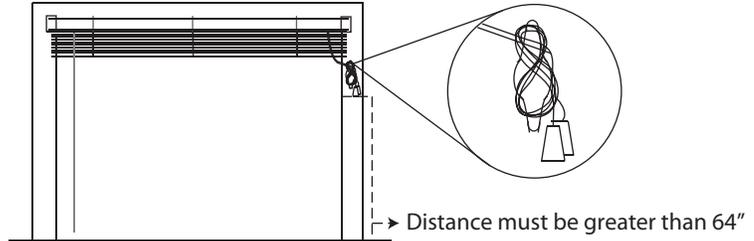

6.2 Placement and usage of cord cleat

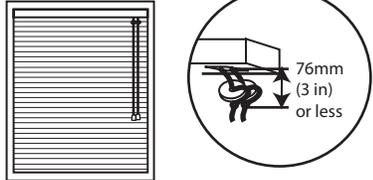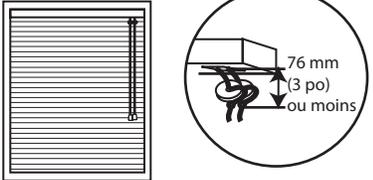WARNING	MISE EN GARDE	<p>7. Inner cord stop device adjustment: The inner cord stop rings are set to 3 in or less at the factory (for a fully lowered blind). If the rings have moved to a distance greater than 3 in, the stop rings must be adjusted for them to function properly. Please follow instructions below on how to adjust them.</p> 
 <p>Inner cords can pull out to form a loop, which can STRANGLE a young child. Inner cord stop devices can reduce this risk if positioned correctly on the pull cords.</p> <p>If inner cord stop devices are more than 76mm (3 in) below the headrail when the blind is fully lowered, move them closer by following the inner cord stop device adjustment instructions.</p>	 <p>Les cordons intérieurs peuvent sortir pour former une boucle et ÉTRANGLER un jeune enfant.</p> <p>Les dispositifs d'arrêt des cordons intérieurs peuvent diminuer ce risque s'ils sont placés correctement sur les cordons.</p> <p>Si les dispositifs d'arrêt des cordons sont situés à plus de 76 mm (3 po) en dessous du rail supérieur quand le store est complètement baissé, rapprochez-les en suivant les instructions de réglage du dispositif d'arrêt du cordon intérieure.</p>	

Cleaning instructions: 1" Aluminum blinds can be cleaned with a feather duster, soft cloth or an appropriate vacuum suction attachment. Do not use liquids or detergents. Use of cleaning liquids/detergents will void your warranty.



WARNING/MISE EN GARDE

Young children can **STRANGLE** in cord and bead chain loops. They can also wrap cords around their necks and **STRANGLE**.

Always keep cords and bead chains out of children's reach.

Move cribs, playpens, and other furniture away from cords and bead chains. Children can climb furniture to get to cords.

Always wrap the cords around the cleats in a figure eight, up high, out of reach of children.

For more safety information: 1-866-662-0666